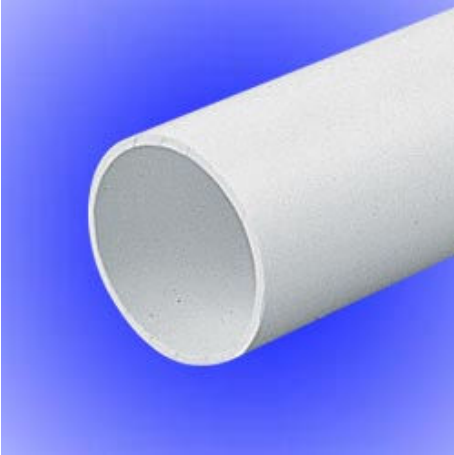


Conduit (Light Gauge) Product Data Sheet

Product Range	CR2, CR3, CR4 CR9 & CR10	<p>Image shown for reference only</p> 
Description	PVCu Round Conduit	
Key Features	Light Gauge Range of Inspection Elbows, Bends & Tees Range of fittings Range of Round & Square boxes Operating Temperature -5°C to +60°C Non-Flame Propagating to BS EN 61386-1 High Impact Resistance to -5°C Heavy Gauge Requirements of BS EN 61386-1	
Dimensions	20mm, 25mm, 32mm, 38mm & 50mm	
Material(s)	PVCu	
Compliance / Standard(s)	CE Marked Low Voltage Directive 2014/35/EC BS 7671:2008+A3:2015 BS EN 61386-1:2008 BS 4607-1:1982+A2:2010 BS 4607-5:1984+A3:2010	
Packaging	Recyclable	

Carbon assessment

The Carbon Trust was set up by Government in 2001 as an independent company. Their mission is to accelerate the move to a low carbon economy by working with organisations to reduce carbon emissions and develop commercial low carbon technologies. Marshall-Tufflex was assessed by the Carbon Trust in 2007 and received an excellent report.

Sustainability

Conduit is manufactured from PVCu, a material that is 100% recyclable and has excellent fire performance.

Quality Management Systems

Marshall-Tufflex is totally committed to quality and customer satisfaction and the Company is recognised by the British Standards Institution as a firm of Assessed Capability to BS EN ISO 9001:2008.

Environmental Management Systems

Marshall-Tufflex is totally committed to achieving high environmental standards. The Company is recognised by the BSI as a firm of Assessed Capability to BS EN ISO 14001:2004 (Environment) and BS EN ISO 50001:2011 (Energy).